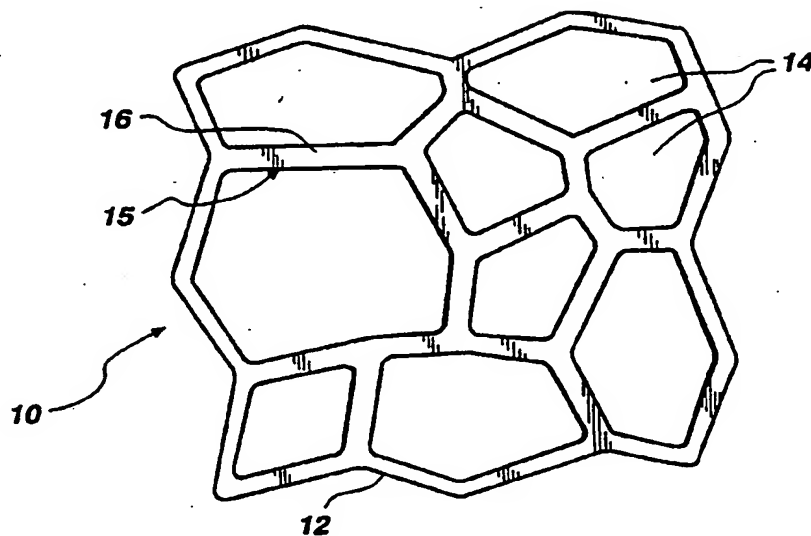


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|--|
| (51) International Patent Classification ⁵ : E01C 15/00 | A1 | (11) International Publication Number: WO 93/25761 (43) International Publication Date: 23 December 1993 (23.12.93) |
| (21) International Application Number: PCT/US93/05815 (22) International Filing Date: 16 June 1993 (16.06.93) (30) Priority data: 900,062 16 June 1992 (16.06.92) US (71) Applicant: WENTWOOD EUROPEAN CORPORATION (IE/US); 5339 Alpha Road, Suite 213, Dallas, TX 75240 (US). (72) Inventor: HUPP, Jack, T. ; 1010 Lively Court, Richmond, TX 77469 (US). (74) Agents: BOND, Laurence, B. et al.; Trask, Britt & Rossa, P.O. Box 2550, Salt Lake City, UT 84110 (US). | | (81) Designated States: AT, AU, BB, BG, BR, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> |

(54) Title: MOLD DEVICE FOR FORMING CONCRETE PATHWAYS**(57) Abstract**

The present invention is directed to an apparatus for forming concrete pathways. The apparatus comprises a mold (10) incorporating a plurality of openings (14) for receiving concrete therein. The mold openings (14) define separate and distinct concrete cavities. Concrete pathways are formed by placing the mold (10) of the invention on a surface for receiving the concrete in the concrete cavities. Upon removal of the mold, the concrete segments retain the shape of the mold cavities and are slightly separated from each other. The procedure is repeated to form a pathway of a desired length and configuration.

BEST AVAILABLE COPY

X.Y-1.26 - Sec 05427-068 37

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | FR | France | MR | Mauritania |
| AU | Australia | GA | Gabon | MW | Malawi |
| BB | Barbados | GB | United Kingdom | NL | Netherlands |
| BE | Belgium | GN | Guinea | NO | Norway |
| BF | Burkina Faso | GR | Greece | NZ | New Zealand |
| BG | Bulgaria | HU | Hungary | PL | Poland |
| BJ | Benin | IE | Ireland | PT | Portugal |
| BR | Brazil | IT | Italy | RO | Romania |
| CA | Canada | JP | Japan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SK | Slovak Republic |
| CI | Côte d'Ivoire | LI | Liechtenstein | SN | Senegal |
| CM | Cameroon | LK | Sri Lanka | SU | Soviet Union |
| CS | Czechoslovakia | LU | Luxembourg | TD | Chad |
| CZ | Czech Republic | MC | Monaco | TC | Togo |
| DE | Germany | MG | Madagascar | UA | Ukraine |
| DK | Denmark | MI | Mali | US | United States of America |
| ES | Spain | MN | Mongolia | VN | Viet Nam |
| FI | Finland | | | | |

WO 93/25761

PCT/US93/05815

MOLD DEVICE FOR FORMING CONCRETE PATHWAYS**BACKGROUND OF THE DISCLOSURE**

The present invention is directed to an apparatus for forming concrete pathways, particularly, a plastic mold for configuring geometric designs for sidewalks, patios, gardens and the like.

The formation of sidewalks or concrete pathways typically requires excavation of a pathway, the assembly of wooden or metal forms which normally are required to restrain the sides of the concrete after pouring and then disassembly of the wooden or metal forms once the concrete has cured. Thus, conventional concrete forming methods are costly both in terms of labor and materials.

Concrete forming devices known in the prior art employ a mold to form the concrete to a desired shape. As the concrete begins to cure, the mold is removed and the next concrete member or section is formed. The use of such mold devices allows concrete sections of relatively uniform shape to be continuously formed having the cross-sectional configuration of the mold. Such prior art devices include U.S. Patent No. 2,893,098 to Tilley which discloses a mold for applying simulated masonry to walls and the exterior surfaces of buildings. U.S. Patent No. 3,600,773 to Davis discloses a concrete forming device of rather complex construction. A mold component of the device includes movable lower side edge portions which are resiliently biased downwardly to accommodate surface irregularities for confining the concrete in the mold.

U.S. Patent No. 4,287,141 to Russell discloses an apparatus for forming embankments of trapezoidal shape. The trapezoidal-shaped shield apparatus is opened at the top and bottom, and rearwardly. Concrete is introduced into the top of the shield for forming each segment of the embankment.

U.S. Patent 4,354,773 to Noack discloses a simulated interlocking stone paving block. The concrete paving blocks are formed with a mold. U.S. Patent No. 4,407,480 discloses a textured brick form. U.S. Patent

WO 93/25761

PCT/US93/05815

-2-

No. 4,609,303 to Schumaker discloses an apparatus for forming concrete pathways. The apparatus continuously moves along the path as concrete is poured through a hopper extending upwardly from the top of the apparatus.

5 As noted in U.S. Patent No. 4,609,303 a critical problem with prior art slip-forming devices used in the construction of concrete pathways is that the concrete that is discharged from such devices tends to crack or fracture. The tendency to crack during setting
10 is particularly acute in applications requiring a concrete aggregate that contains an amount of water sufficient to insure the formation of a smooth surface as the concrete member is being discharged from the form. Frequently, an entire concrete section must be removed
15 and repoured due to the cracking and/or fragmentation following setting.

The concrete forming apparatus of the present invention overcomes the disadvantages of the prior art devices by providing a mold to rapidly (usually within
20 two minutes) form an entire section of concrete comprising a plurality of discrete concrete segments substantially smaller in dimension than formed by prior art devices thereby reducing the likelihood of cracks or fractures. The mold is configured such that two sides of
25 the apparatus will always interlink with a previously formed section to provide for an apparent seamless unbroken association between the new section and the previously formed section. The discrete concrete segments may be left separated from and independent of
30 each other with earth or some other material utilized as a stabilizer or the segments can be bound together as a unit by the mold and each adjacent unit can be bound to a previously formed unit, if accomplished before the concrete sets up. The binding process is accomplished
35 by; removing the form immediately after filling each cavity with concrete, distributing a small amount of concrete between each segment, replacing the mold and

WO 93/25761

PCT/US93/05815

-3-

applying downward pressure to the mold thereby distributing the added concrete evenly throughout the mold matrix and binding each segment to an adjacent segment at its lower extremity. Binding of each segment can also be accomplished by evenly spreading a layer of concrete on the surface of the ground prior to placing the mold and filling its cavities in the conventional manner. This allows for a concrete underlayment and attachment of the discrete segments. The present invention also overcomes the disadvantages of prior art by allowing partial segments of the mold to be utilized in the forming of curves, flares, and circles that interconnect in an apparent seamless manner thereby allowing for maximum flexibility in the design of pathways and other ground covering.

SUMMARY OF THE INVENTION

The present invention is directed to a mold for forming concrete pathways. The mold comprises a plurality of openings for receiving concrete therein. The mold openings define separate and distinct mold cavities. The mold of the invention is placed on a substantially flat surface for receiving concrete in the mold cavities. Upon removal of the mold of the invention the concrete segments retain the shape of the mold cavities and are slightly separated from each other thereby forming a concrete pathway section of discrete concrete segments.

DETAILED DESCRIPTION OF THE DRAWINGS

So that the manner in which the above recited features, advantages and objects of the present invention are attained and can be understood in detail, a more particular description of the invention, briefly summarized above, may be had by reference to the embodiments thereof which are illustrated in the appended drawings.

WO 93/25761

PCT/US93/05815

-4-

It is to be noted, however, that the appended drawings illustrate only typical embodiments of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other
5 equally effective embodiments.

Fig. 1 is a top plan view of the mold of the invention;

Fig. 2 is a section view taken along line 2-2 of Fig. 3;

10 Fig. 3 is a bottom, plan view of the mold of the invention;

Fig. 4 is an end view of the mold of the invention;

15 Fig. 5 is a bottom, view of an alternate embodiment of the mold of the invention, and

Fig. 6 is an illustration of concrete segments formed with the mold of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

20 Referring first to Fig. 1, the concrete mold of the present invention is generally identified by the reference numeral 10. The mold 10 comprises a plastic body 12 which is substantially planar, and in the embodiment shown in Figs. 1-4 defines an irregular
25 configuration. It is understood however that the mold 10 may be formed in any desired configuration. In Fig. 5, for example, the mold 10 embodies a straight-line profile; the sidewalls and interconnecting members join to form precise triangles and squares. The outside
30 dimensions of the mold 10 are approximately 2 feet by 2 feet and the height of the mold 10 is approximately 1 1/2 to 2 inches.

As shown in Fig. 1, the perimeter sidewalls 11 of the mold 10 circumscribe a plurality of irregular
35 shaped openings 14. The openings 14 are formed by a plurality of interconnecting members 15 which are approximately 1 1/2 inches in width. The interconnecting

WO 93/25761

PCT/US93/05815

-5-

members 15 include substantially horizontal, upper planar surfaces 16 which define the upper exposed face or surface of the mold 10.

Depending downwardly from the interconnected planar surfaces 16 are a plurality of interconnecting ribs 18 which enclose, and define the depth of the mold cavities 14 below the exposed upper surface of the mold 10. The ribs 18 are relatively narrow at the lower ground engaging end thereof and curve outwardly and merge with the bottom of the planar surface 16 of the interconnecting members 15. The ribs 18 are substantially T-shaped in cross-section as shown in Fig. 2. The T-shaped configuration of the ribs 18 permits the mold 10 to form discrete concrete segments 20 which are curved about the perimeter thereof so that the tendency of the concrete segments to crack or fracture when the mold 10 is removed is virtually eliminated.

The perimeter sidewalls 11 of the mold 10 defined by the sidewalls 11 present a profile which is the reverse of the opposite side of the mold 10 so that each section of a pathway 30, as best shown in Fig. 6, formed by the mold 10 will interlink with a previously formed concrete section. By alternately rotating the mold 10 one quarter turn to interlock with a previously formed concrete section, a more random pattern of discrete concrete segments 20 is achieved.

Use of the mold 10 to form a concrete pathway is relatively simple. The mold 10 is placed directly on any relatively flat surface. It will automatically configure the concrete to the existing base. For professional results, removal of about one inch of top soil and leveling of the mold 10 before filling the cavities 14 with concrete is recommended. The removed top soil may be utilized later to fill in the open spaces 22 on the sides and between the concrete segments 20 after the concrete pathway 30 has been completed. It is recommended that one gallon of water be mixed with one

WO 93/25761

PCT/US93/05815

-6-

80-pound bag of pre-mix cement. The cement should be thoroughly mixed until a plastic-like consistency is reached. If additional water is required, one cup at a time is added until the correct consistency is attained. Thereafter, each mold cavity 14 is filled with the cement mixture and is leveled with the upper surface 16 of the mold 10. The surface of the concrete segments 20 may be smoothed with a trowel if desired. After removing the mold 10, the edges of the concrete segments 20 may be smoothed with the trowel until a satisfactory appearance is achieved.

The mold 10 is configured such that two sides thereof will always interlink with a previously formed section to provide for an apparent seamless unbroken association between new section and the previously formed section of the pathway 30. The discrete concrete segments 20 may be left separated from and independent of each other with earth or some other material utilized as a stabilizer or the segments 20 may be bound together as a unit by the mold 10 and each adjacent unit can be bound to a previously formed unit, if accomplished before the concrete sets up.

The binding process is accomplished by removing the mold 10 immediately after filling each cavity 14. with concrete, distributing a small amount of concrete between each segment 20, replacing the mold 10 and applying downward pressure to the mold 10 thereby distributing the added concrete evenly throughout the mold matrix and binding each segment 20 to an adjacent segment 20 at its lower extremity. Binding of each segment 20 can also be accomplished by evenly spreading a layer of concrete on the surface of the ground prior to placing the mold 10 and filling its cavities 14 in the conventional manner. This allows for a concrete underlayment and attachment of the discrete segments 20. Partial segments 20 of the mold 10 may be in an apparent seamless manner thereby allowing for maximum flexibility

WO 93/25761

PCT/US93/05815

-7-

in the design of pathways and other ground covering.

While the invention herein is described in what is presently considered to be a practical preferred embodiment thereof, it will be apparent that many
5 modifications may be made within the scope of the invention, which scope is to be accorded the broadest interpretation of the appended claims so as to encompass all equivalent methods and apparatus.

10 While the foregoing is directed to the preferred and illustrated embodiments, the scope is determined by the claims which follow:

WO 93/25761

PCT/US93/05815

-8-

CLAIMS

What is claimed is:

1. An apparatus for forming a concrete
pathway, comprising a mold, said mold including perimeter
sidewalls and a plurality of interconnecting members,
wherein said sidewalls and said interconnecting members
circumscribe a plurality of openings for forming separate
concrete cavities and wherein said sidewalls and said
interconnecting members further include rib members
depending downwardly therefrom.

2. The apparatus of claim 1 wherein said mold
is substantially square.

3. The apparatus of claim 1 wherein said
openings are irregular in shape.

4. The apparatus of claim 1 wherein said
openings are substantially identical in shape.




5. The apparatus of claim 1 wherein said rib
members are substantially T-shaped in cross-section.

6. The apparatus of claim 1 wherein said
perimeter sidewalls of said mold define an irregular
profile.

7. The apparatus of claim 1 wherein said mold
includes opposite sidewall members defining a profile
which is the reverse of the, opposite sidewall members
for interlinking different segments of the concrete
pathway end to end.

WO 93/25761

PCT/US93/05815

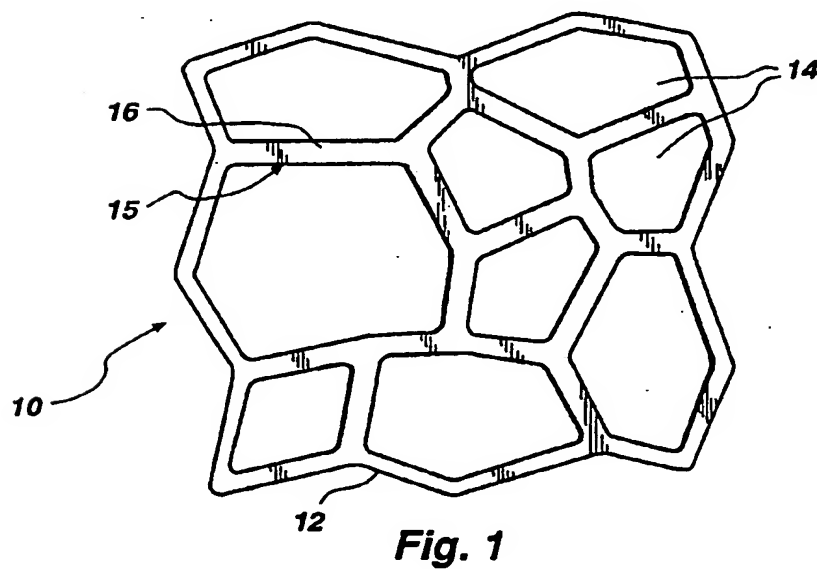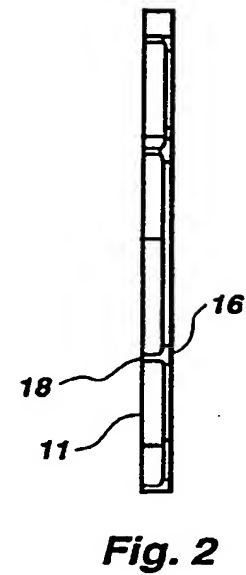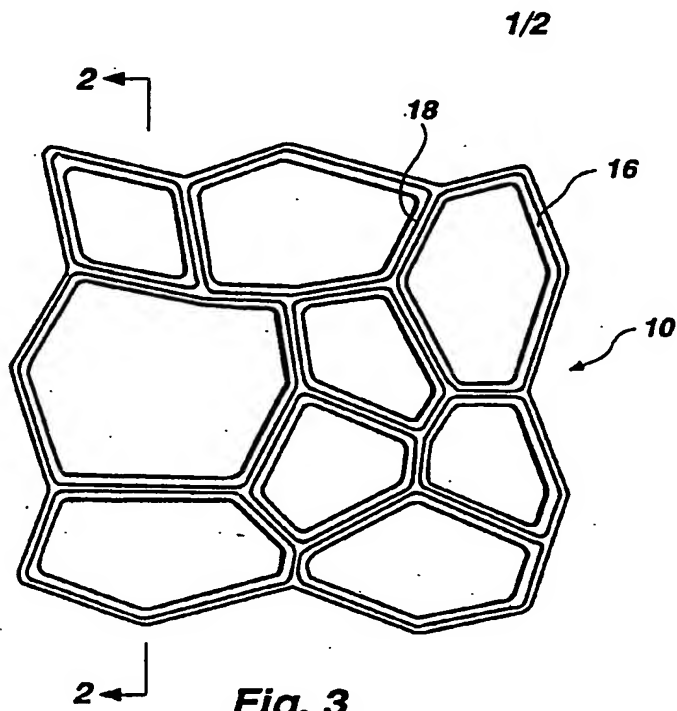

SUBSTITUTE SHEET

WO 93/25761

PCT/US93/05815

2/2

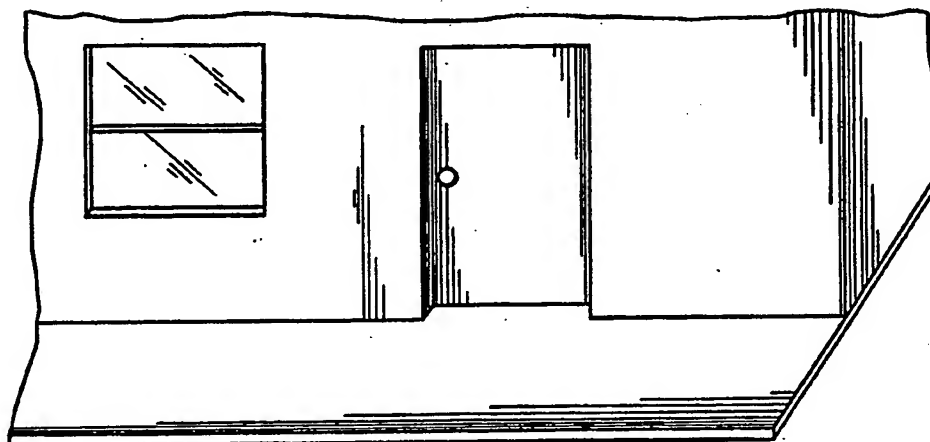


Fig. 6

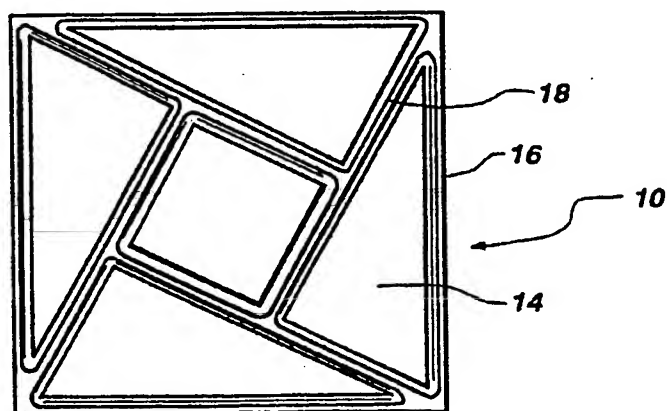
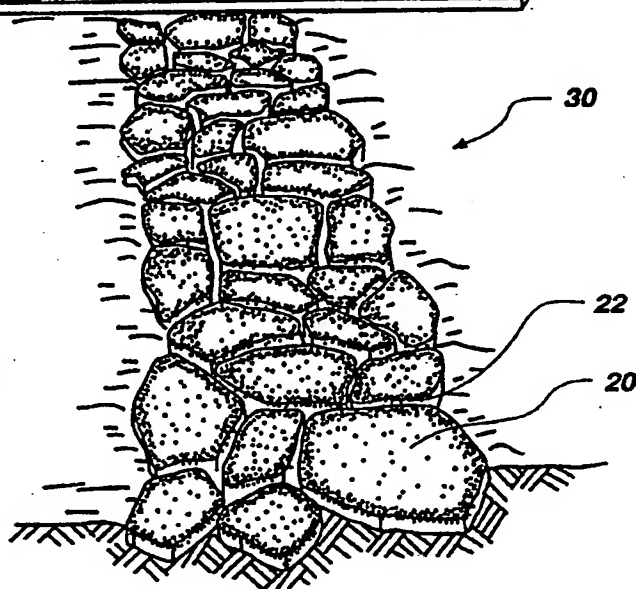


Fig. 5

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US93/05815

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : E01C 15/00

US CL : 249/002, 131, 132; 404/041, 042

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 249/002, 131, 132; 404/041, 042

249/009, 189; 404/087, 089, 093; 425/087, 458

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| X | US, A, 4,627,764 (Scheiwiller) 09 December 1986. See col.s 2-3 and figs. 8-9. | 1-5 |
| X | US, A, 1,600,787 (Ardit) 21 September 1926. See whole document. | 1-4 and 7 |
| Y | US, A, 2,050,299 (Evers) 11 August 1936. See whole document. | 3 and 6-7 |

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

| | | | |
|-------|---|-----|--|
| * "A" | Special categories of cited documents: document defining the general state of the art which is not considered to be part of particular relevance | "T" | later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "E" | earlier document published on or after the international filing date | "X" | document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "L" | document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" | document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" | documents referring to an oral disclosure, use, exhibition or other means | "Z" | document member of the same patent family |
| "P" | document published prior to the international filing date but later than the priority date claimed | | |

Date of the actual completion of the international search

04 AUGUST 1993

Date of mailing of the international search report

16 AUG 1993

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

JOSEPH LEYSON

Telephone No. (703) 308-2647

THIS PAGE BLANK (USF 10)

01920 / PAGE 71/60
**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)